


## Universal controller with two row display

### Single channel process controller with autotuning PID parameters functions

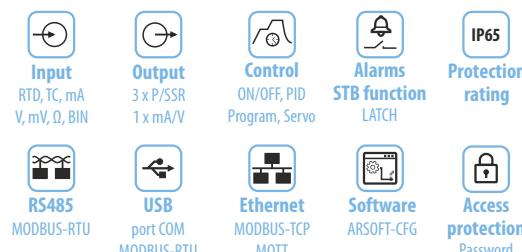

Bargraph  
8-segment

- control and monitoring of temperature and other physical values (humidity, pressure, flow rate, level, speed, etc.) processed to a standard electrical signal
- configurable architecture enabling use in many fields and applications (industrial, heating, food, energy, etc.)
- **universal measuring input** (resistance thermometers, thermocouple, analogue 0/4–20mA, 0–10V, 0–60mV, 0–2,5kΩ)
- **2 function buttons (F i SET)** and digital input (**BIN**) for quick selection operating mode of controller, separately programmable: start/stop of control, manual/ automatic mode for outputs, step change of the set point value SP (day / night, with separate control parameters), keyboard lock, resetting errors and alarms STB (LATCH)
- **3 control/alarm outputs** ON/OFF type (two-state P/SSR) with independent functionalities and control algorithms:
  - ON-OFF with hysteresis (characteristics for heating and cooling, band alarms in range, out of range and with deviation for 3-position control)
  - **PID** (selection of independent 3 sets of parameters), advanced functions of automatic tuning of PID parameters, **smart logic**
  - programmed control characteristic (**process controller with timer**, up to **6 sections**, including 3 ramping sections - inclination for heating/cooling or for cooling/defrosting, 3 setpoints SP with ON-OFF or PID control, selection of the auxiliary output and its status, displaying remaining time for the entire section or after exceeding SP, etc.)
  - thermostat/ safety controller **STB** (alarm state open or closed, can be used as **LATCH alarm memory** e.g. when exceeds a threshold or a band)
  - ability to control a three-way mixing valve with an actuator (**step control, Servo**) with two contact inputs (open - close)
  - **manual mode** (open control loop) with initial value of control signal (MV) taken from current automatic mode or programmed by user
  - direct or inverse copy of the output 1 state (applies to outputs 2 and 3, can be used e.g. to implement **DPDT** changeover relay or to take over the function of the damaged P1)
  - **limiting** maximum level of output signal (**power**), also includes associated mA/V analog output
- analog output **0/4–20mA lub 0/2–10V** for control or retransmission of measurements and set values:
  - getting control parameters from any associated two state output (1, 2, 3), both in automatic and manual mode
  - shockless (soft) switching of the output signal, e.g. after changing manual/automatic mode or control start/stop
  - correction (calibration) of range of changes of output signal (offset for end values to obtain non-standard ranges e.g. 2–16mA or 1–9V)
- **wide range of supply voltages (18–265 Vac / 22–350 Vdc)** and built-in power supply for supplying on-site transducers **24Vdc/30mA**
- **readable LED display with adjustable brightness**, typical **units of measurement** and signaling work status (messages, errors, etc.):
  - white color - measured value PV (upper row), units and symbols of status of outputs and serial transmissions (1, 2, 3, °C, %, %RH, mA, A, mV, V, m, . or none)
  - red, bottom row - selectable setpoints SP or 8-segment **bargraph** for MV (control signal), PV (measurement), output signal mA/V or none
- optional **RS485** serial interface, protocol **MODBUS-RTU** for reading measurements and parameter configuration
- optional **Ethernet** interface, protocol **MODBUS-TCP i MQTT** (for internet of things **IoT/M2M**, a cloud and mobile applications), possibility of data exchange via the **Internet**
- **USB** interface (micro USB port, standard equipment, for parameter programming, viewing measurements and updating firmware)
- automatic or fixed line resistance compensation for resistive sensors and temperature of cold thermocouple ends
- programmable type of input, indication range (for analog inputs), control options, alarms, display, communication, access, and other configuration parameters
- access to configuration parameters protected with a user password or without protection
- methods for configuring parameters:
  - via membrane keyboard IP65 located on the front panel
  - via USB, RS485 or Ethernet and freeware ARsoft-CFG (for Windows 7/10) or user application (using protocols MODBUS-RTU i TCP)
- free software ARSOFT-CFG (download from [www.apar.pl](http://www.apar.pl)) enabling the preview of measured value and quick configuration single or ready parameter sets previously saved on a computer for re-use, e.g. in other controllers of the same type (duplicate configuration)
- panel housing, IP65 from the front (after using an additional accessory gasket or other sealing), IP54 without a gasket
- modern technical solutions, intuitive and clear operation, **high accuracy** and long-term stability as well as resistance to interference
- optional to choose from (in the way of ordering): control outputs for SSR, analog output 0/2–10V (instead 0/4–20mA) and RS485 and Ethernet interface (RJ45 connector)

#### Contents of set:

- controller with handles mounting
- user manual and warranty card


#### Available accessories:

- gasket for IP65 tightness from the front
- USB cable (A - micro B) for connection with a computer, length 1.5 m
- USB to RS485 converter (with galvanic separation)

## TECHNICAL DATA

<b>Number of measuring inputs</b>	1 universal (resistance thermometer RTD, thermocouple, analog mA/V/Ω)
<b>Universal input</b> (programmable, 17 types, conversion A/C 18 bits), measuring ranges	
- Pt100 (RTD, 3- or 2-wire)	-200 ÷ 850 °C - thermocouple R (TC, PtRh13-Pt) -40 ÷ 1600 °C
- Pt500 (RTD, 3- or 2-wire)	-200 ÷ 620 °C - thermocouple T (TC, Cu-CuNi) -25 ÷ 350 °C
- Pt1000 (RTD, 3- or 2-wire)	-200 ÷ 520 °C - thermocouple E (TC, NiCr-CuNi) -25 ÷ 820 °C
- Ni100 (RTD, 3- or 2-wire)	-50 ÷ 170 °C - thermocouple N (TC, NiCrSi-NiSi) -35 ÷ 1300 °C
- thermocouple J (TC, Fe-CuNi)	-40 ÷ 800 °C - current (mA, R <sub>we</sub> = 50 Ω) 0/4 ÷ 20 mA
- thermocouple K (TC, NiCr-NiAl)	-40 ÷ 1200 °C - voltage (V, R <sub>we</sub> = 110 kΩ) 0 ÷ 10 V
- thermocouple S (TC, PtRh 10-Pt)	-40 ÷ 1600 °C - voltage (mV, R <sub>we</sub> > 2 MΩ) 0 ÷ 60 mV
- thermocouple B (TC, PtRh30PtRh6)	300 ÷ 1800 °C - resistance (R, 3- or 2-wire) 0 ÷ 2500 Ω
<b>Response time for measurements</b> (10÷90%) 0,2 ÷ 3,5 s (programmable, default ~0,5 s)	
<b>Resistance of leads</b> (RTD, R)	R <sub>d</sub> < 25 Ω (for each line), compensation of line resistance
<b>Resistive input current</b> (RTD, R)	400 μA (Pt100, Ni100), 200 μA (Pt500, Pt1000, 2500 Ω)
<b>Processing errors</b> (at 25°C ambient temperature):	
- basic	- for RTD, mA, V, mV, R 0,1 % of the measurement range ±1 digit
	- for thermocouples 0,2 % of the measurement range ±1 digit
- additional for thermocouples	< 2 °C (compensation of temperature of cold ends)
- additional from ambient temp. changes	< 0,004 % of the input range /°C
<b>Indication range</b> (programmable)	
	total -1999 ÷ 9999 (maximum range of indications for analog inputs)
<b>Display resolution / dot position</b>	
	programmable, 1 ÷ 9999, for thermometric inputs 0,1 °C or 1 °C
<b>Outputs P/SSR</b>	- relay P1÷P3 (3 separate) - SSR1÷SSR3 (option)
	1 x SPDT (8A/250Vac, for resist.), 2 x SPST-NO (5A/250Vac), standard outputs 1,2 transistor type NPN OC, 11V, current < 23mA, standard for output 3
<b>Analogue output</b> (mA or V, without separation from input)	- current (standard) 0/4 ÷ 20 mA, load R <sub>o</sub> < 1 kΩ, max resolution 1,4 μA, 14 bit, active - voltage (option) 0/2 ÷ 10 V, load I <sub>o</sub> < 3,7 mA (R <sub>o</sub> > 2,7 kΩ), max resolution 0,7 mV, 14 bit errors (at 25°C) podstawowy < 0,1 % zakresu wyjściowego, dodatkowy < 0,004 % /°C
<b>Digital input BIN</b> (2-state)	contact or voltage < 24V, active level: short circuit or < 0,8V
<b>Power</b> (Usup, universal, comply with the standards 24Vac/dc and 230Vac)	18 ÷ 265 Vac, < 3VA (alternating voltage, 50/60Hz) 22 ÷ 350 Vdc, < 4W (direct voltage)
<b>Power supply of field transducers</b>	24Vdc/30mA
<b>Communication interfaces</b> (independent, they can be used simultaneously)	- <b>USB</b> (micro type B, standard) drivers for the Windows 7/8/10 (virtual serial port COM, communication with computer, MODBUS-RTU protocol, Slave) - <b>RS485</b> (option) MODBUS-RTU protocol (Slave), bitrate 2,4 ÷ 115,2 kbit/s, programmable sign format (8N1, 8E1, 8O1, 8N2), galvanic separation - <b>Ethernet</b> (option) RJ45 connector, 10base-T, protocols TCP/IP: MODBUS-TCP (Server), MQTT (client, v.3.1.1), DHCP (client, ICMP (ping), galvanic separation
<b>Display</b> (LED with brightness adjustment, signaling status of outputs and measuring units)	top row: white color, 7-segment, height digit 13 mm bottom row: red color, 7-segment, height digit 10,5 mm
<b>Rated operating conditions</b>	0 ÷ 50°C, <100 %RH (no condensation) air and neutral gases, no dust
<b>Protection rating</b>	IP65
<b>Electromagnetic compatibility</b>	immunity: according to PN-EN 61000-6-2, emission: PN-EN 61000-6-4
<b>Safety requirements according to PN-EN 61010-1</b>	overvoltage category: II pollution degree: 2 voltage to the ground (earth): 300 V for power supply and output relay circuits 50 V for other inputs/outputs circuits and communication interfaces insulation resistance > 20 MΩ height above sea level < 2000 m

## How to order

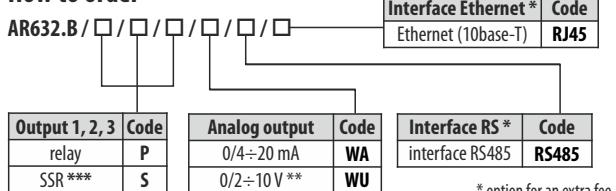

\* option for an extra fee

\*\* output 0/2 ÷ 10 V it is mounted instead of the output 0/4 ÷ 20 mA (standard)

\*\*\* order with only one SSR output is only available for output 3 (fully functional)


**Order examples** (standard execution):

**AR632.B / P / P / S / WA**

AR632.B, 1 and 2 relay outputs, output 3 for control SSR (NPN-OC),  
analog output 0/4 ÷ 20 mA (active), without RS485 and Ethernet interfaces



## INSTALATION DATA

<b>Enclosure and material</b>	industrial IP65, Gainta G2104, polycarbonate
<b>Dimensions and weight</b>	120 x 80 x 55 mm (without glands), ~320 g
<b>Fixing methods (on wall)</b>	4 holes Ø 4.3 mm, spacing 108x50 mm, mounting holes are available after removing the front cover
<b>Conductor cross-sections</b>	2.5mm <sup>2</sup> (supply and outputs P/SSR), 1.5mm <sup>2</sup> (others), inserted through cable glands M16 (x4)

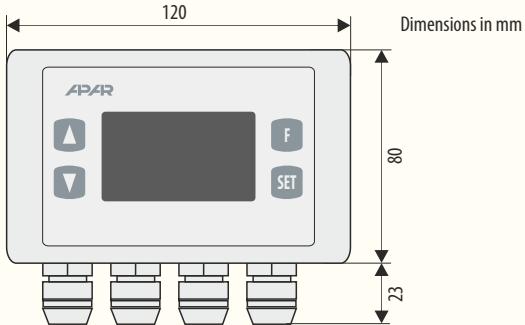


## TERMINAL STRIPS, ELECTRICAL CONNECTIONS

### 1. Description of connectors (available after removing the front cover and display board, except USB)

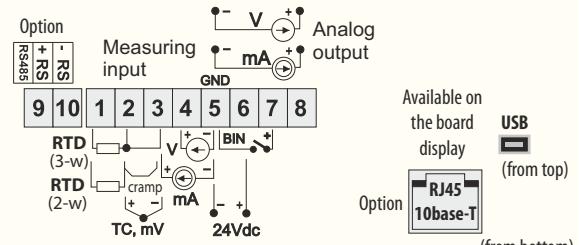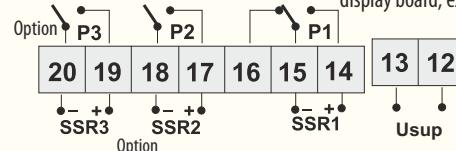


### 2. Connection of a 2- and 3-wire transducer

(I<sub>o</sub> - current, U<sub>o</sub> - voltage output)

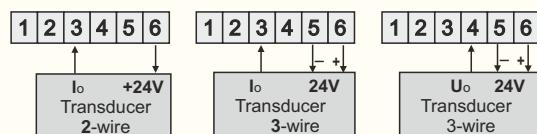

### 3. Connection of a SSR type relay to regulator's control output

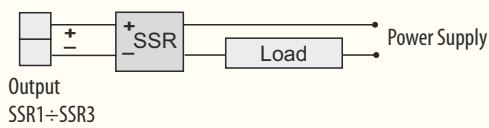

### 4. Galvanic separation of circuits

