AR208

Multi-channel data recorder







Methods of data presentation











Web Server



- 8 universal input (thermoresistance, thermocouple and analog)
- measurement and recording of temperature from thermoresistance sensors and thermocouples and other
 physical values (humidity, pressure, level, flow, speed, etc.) processed to a standard electrical signal
 (0/4÷20mA, 0÷10V, 0÷60mV, 0÷850") or pulse signals (frequency, flow, counting, etc.)
- 4 alarm/regulation outputs with sound and visual operating status signaling and e-mail notofications, programmable characteristics, and the possibility to assign any measurement channels that trip the alarm
- a color graphic display, LCD TFT, 320x240 points (QVGA) with a touch screen, brightness adjustment, and programmable background color for individual measurement channels
- rich standard equipment with serial interfaces: USB (cooperation with a computer and USB memories),
 RS485 and Ethernet (100base-T, TCP/IP protocols), MODBUS-RTU and M ODBUS-TCP
- saving data in standard text files stored in the recorder's internal memory (4 GB) or in a USB memory (FAT system) supported by computers, tablets, etc.
- reading archive data via USB (computer, USB stick) or Ethernet with the option of editing in spreadsheets in such software as Microsoft Excel and OpenOffice Calc
- web server for cooperation with any web browser (Opera, IE, Firefox, etc.), the site contains information on active measurement channels, time, status of outputs, recording, etc., with the possibility to present charts using the Google Chart API service (permanent Internet access is required to present charts)
- the DDNS service, which enables easy access over the Internet a recorder connected to a network that has
 no fixed public IP address, through a friendly Internet address defined by the user; the service is available
 only for registered users of popular DDNS services, such as DynDNS (www.dyndns.org),
 No-IP (www.no-ip.com), and DNS-O-Matic (www.dnsomatic.com)
- a programmable language of the menu and the site saved on web server (Polish, English)
- programmable F button for quick selection of one of the available functions: stop/start of recording, copying or transfer of archives into USB memory, blocking of outputs, sound alarms or touch screen and keypad, device and internet services status
- programmable types of inputs, ranges of indications, alphanumeric description of channels and measurement groups, options of recording, alarms, display, communication, access, and other configuration parameters
- access to configuration parameters protected with a user password or not protected with a password
- parameter configuration methods:
 - from the film keypad and a touch screen located on the front panel of the device
- via the USB, the RS485, or the Ethernet and the ARSOFT-CFG free software (Windows Vista/7/8/10) or a user's application, the MODBUS-RTU and MODBUS-TCP communication protocols
- from configuration files saved in the USB memory or on a computer disk
- available protection of measurement data from unauthorized copy or modification
- graphic and text methods of presentation of the measured values (bar graph, analog indicator, chart)
- grouping of measurement channels to be displayed, with automatic formatting of the screen
- internal real time clock with a battery backup power supply (up to 8 years of continuous operation)
- an integrated 24 V DC power supply supplying the field transducers, flowmeters, etc.
- compensation of line resistance for resistance sensors in 2- or 3-wire connection
- compensation of thermocouple cold tip temperature (automatic or permanent)
- enclosed free software enabling graphic or text presentation of recorded result (ARSOFT-WZ3) and configuration of parameters (ARSOFT-CFG)
- recording of data until the memory is full (at least 470 days of continuous operation with recording of 8 channels every 1 s)
- a broad selection of methods of initiation of recording (continuous, limited by date and time, repeated daily, over or under a permission threshold connected with any measurement channel)
- USB drivers for Windows 7/8/10
- possibility to distinguish archives from many recorders of the same time thanks to individual assignment
 of an identification number (ID)
- clearly visible status of operation of recording, memory, USB port, alarms, file and disk operations, serial transmission (USB, RS485, Ethernet), etc.
- high accuracy and immunity to interferences
- possibility to latest firmware upgrade via USB memory
- two-chamber housing for wall mounting, IP65 tightness
- possibility of mounting on 35 mm DIN rail



For Example:

AR208/S1/P - power supply 230 Vac, 4 wyjścia przekaźnikowe

TECHNIC	CAL DATA						
Number of measurement inputs 8 u			niversal not galvanically isolated				
Universal inputs (p	orogrammable, 16	types), measurement range	es (1))		
- Pt100 (RTD, 3- or 2-wire) -20		0 ÷ 850 °C		- thermocouple R (TC, PtRh13-Pt) -40		-40 ÷ 1600 °C	
- Pt500 (RTD, 3- or 2-wire)		-200	-200 ÷ 620 °C		thermocouple T (TC, Cu-CuNi)		-25 ÷ 350 °C
- Pt1000 (RTD, 3- or 2-wire) -		-200	200 ÷ 620 °C		thermocouple E (TC, NiCr-CuNi) -25 ÷ 850 °C		
		-50	-50 ÷ 170 °C		thermocouple N (TC, NiCrSi-NiSi) -35 ÷ 1300 °C		
- thermocouple J (TC, Fe-CuNi) -		-40	10 ÷ 800 °C			$(mA, Rwe = 100 \Omega)$	0/4 ÷ 20 mA
) ÷ 1200 °C - v			V, Rwe = 150 kΩ)	0 ÷ 10 V	
			· ·				0 ÷ 60 mV
- thermocouple B (To	•	300) ÷ 1800 °C			0 ÷ 850 Ω	
		1 ÷ 5 s (programmable)					
Response time (10 ÷ 90%) Resistance of leads (RTD, R)		Rd $< 25 \Omega$ (for each line)					
Resistance input current (RTD, R) Processing errors(at ambient temperature		650 μA (Pt100, Ni100, 850Ω), 150 μA (Pt500, Pt1000), multiplexed					
- basic			0.1% of the measurement range ±1 digit				
busic	- for thermocouples		• •				
<u> </u>			0.2% of the measurement range ±1 digit < 2°C (compensation of temperature of cold tips)				
- additional for thermocouples							
- additional from ambient temperature			< 0.005% of the input range /°C				
Range of indications (programmable)		ne)	-9999 ÷ 19999 (resolution of analog inputs), 0 ÷ 99999 (pulse inputs)				
Resolution / dot p			programmable, 0 ÷ 0,000, for thermometric inputs 0,1 °C or 1 °C				
Communication interfaces (in IP30 version	-USB (A4 socket type, programmable mode of operation)		 - slave mode (device, communication with a computer) 		(read	ers for the Windows 7/8/ [*] ling ~ 335kB/s) + virtua DBUS-RTU protocol)	,
USB also			- master mode (host) support of USB memory (pendrive) up to 4 GB				
accessible from the front)	-RS485		MODBUS-RTU protocol, SLAVE, speed 2.4÷115.2 kbit/s, sign format 8N1, galvanic separation				
-Ethernet			100base-T, RJ45, web server, MODBUS-TCP, e-mail client (SMTP), DDNS server client, TCP/IP protocols: DHCP (client, server), SMTP, NetBIOS, ICMP, UDP, TCP, data transfer up to 135 kB/s (depending on the network)				
Data recording interval			programmable 1 s to 8 hours(4)				
Data storage mem	nory(non-volatile, i	record	ding of approx. 42x10	^6 n	neasur	ements from 8 channels	and 4 GB memory):
- internal		4GB, FAT32 file system, micro SDHC card, industrial, MLC					
- external USB memory (pendrive)			FAT16, FAT32, maximum size 4 GB, pendrive, A4 type socket				
Real time clock (RTC)		quartz, date, time, takes leap years into account, CR1220 lithium battery					
(A conorato)	•		5A / 250Vac (for resistance loads), SPST				
(4 separate) – SSR (optional)		ansistor, type NPN OC, 24V, internal resistance 850Ω					
LCD graphic display			TFT, 320x240 points (QVGA), 3.5", background brightness adjustment				
Touch panel		resistance, integrated with LCD display					
Power supply(Usup) - 230Vac - 24Vac/dc (option)			85 ÷ 260 Vac/ 7VA				
			20 ÷ 50 Vac/ 7VA, 22 ÷ 72 Vdc/ 7W				
Power supply of field transducers		24Vdc/200mA (100 mA in the case of the 24 VAC/DC supply)					
Rated operating conditions		$0 \div 50^{\circ}\text{C}, <100~\text{\%RH}$ (no condensation), air and neutral gases, no dust					
Protection rating			IP65				
Electromagnetic c	ompatibility (EM	IC)	immunity: according to the PN-EN 61000-6-2, emission: PN-EN 61000-6-4				
Safety requirements according to			overvoltage category: II pollution degree: 2				
PN-EN 61010-1 standard			voltage to the ground (earth): 300 V for power supply and output relay circuits, 50 V for other inputs/outputs circuits and communication interfaces				


(1) - in the case of recording interval of 1 s, the recording may be uneven during the transfer of the archive over the Ethernet and also due to the excessive number of files, their size, and the type and brand of the USB (pendrive) memory used

insulation resistance > 20 M"

Enclosure type	STALLATION DATA Wall 2-chamber, Gainta DC001CBU		
Material	ABS (UL 94-HB)		
Dimensions, weight, tightness	200 x 195 x 93 mm, ~1050g, IP65		
Access to connectors	Cable glands M16 (x1), M20 (x3)		
Conductor cross-sections (separable connectors)	2.6mm ² =13AWG (power supply, alarm outputs) 1.3mm ² =16AWG (others)		
	200 (with hinges)		

195

(with cable glands)

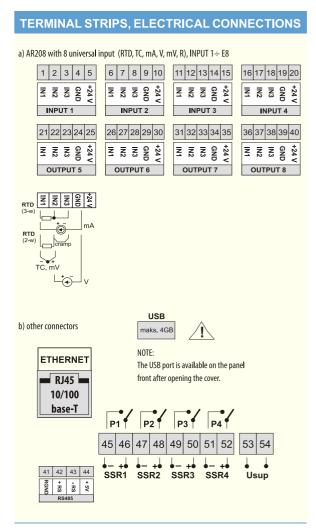

height above sea level < 2000 m